



InvenSense Inc.
1745 Technology Drive, San Jose, CA, 95110 U.S.A.
Tel: +1 (408) 501-2200 Fax: +1 (408) 988-7339
Website: www.invensense.com

Document Number:
Revision: 1.0
Release Date:

Demo COM Port Setup v1.1


A printed copy of this document is
NOT UNDER REVISION CONTROL
unless it is dated and stamped in red ink as,
“REVISION CONTROLLED COPY.”


This information furnished by InvenSense is believed to be accurate and reliable. However, no responsibility is assumed by InvenSense for its use, or for any infringements of patents or other rights of third parties that may result from its use. Specifications are subject to change without notice. InvenSense reserves the right to make changes to this product, including its circuits and software, in order to improve its design and/or performance, without prior notice. InvenSense makes no warranties, neither expressed nor implied, regarding the information and specifications contained in this document. InvenSense assumes no responsibility for any claims or damages arising from information contained in this document, or from the use of products and services detailed therein. This includes, but is not limited to, claims or damages based on the infringement of patents, copyrights, mask work and/or other intellectual property rights.


Certain intellectual property owned by InvenSense and described in this document is patent protected. No license is granted by implication or otherwise under any patent or patent rights of InvenSense. This publication supersedes and replaces all information previously supplied. Trademarks that are registered trademarks are the property of their respective companies. InvenSense sensors should not be used or sold in the development, storage, production or utilization of any conventional or mass-destructive weapons or for any other weapons or life threatening applications, as well as in any other life critical applications such as medical equipment, transportation, aerospace and nuclear instruments, undersea equipment, power plant equipment, disaster prevention and crime prevention equipment.


1. The ARM Board is already flashed, however if a reflash is needed the correct firmware can be found at the following path. Flash the ARM board using SAM-ICE or J-link emulation tool
Firmware is provided as c:\program files\ InvenSense\InvenSense Universal Datalogger\ARM Firmware\ARM_Firmware_3_0.bin
2. Your system should automatically update the drivers when installing the Universal Datalogger 1.1 and the COM port should recognize the ARM board as "InvenSense ARM EVB".
3. In the event (AT9USBSerial or GPS Camera are detected) that you need to manually update the driver the following steps will describe this process. Plug in the EVB board and follow the steps below to update the driver.



File needed: c:\program files\ InvenSense\InvenSense Universal Datalogger\drivers\InvenSenseARM_EVB.inf

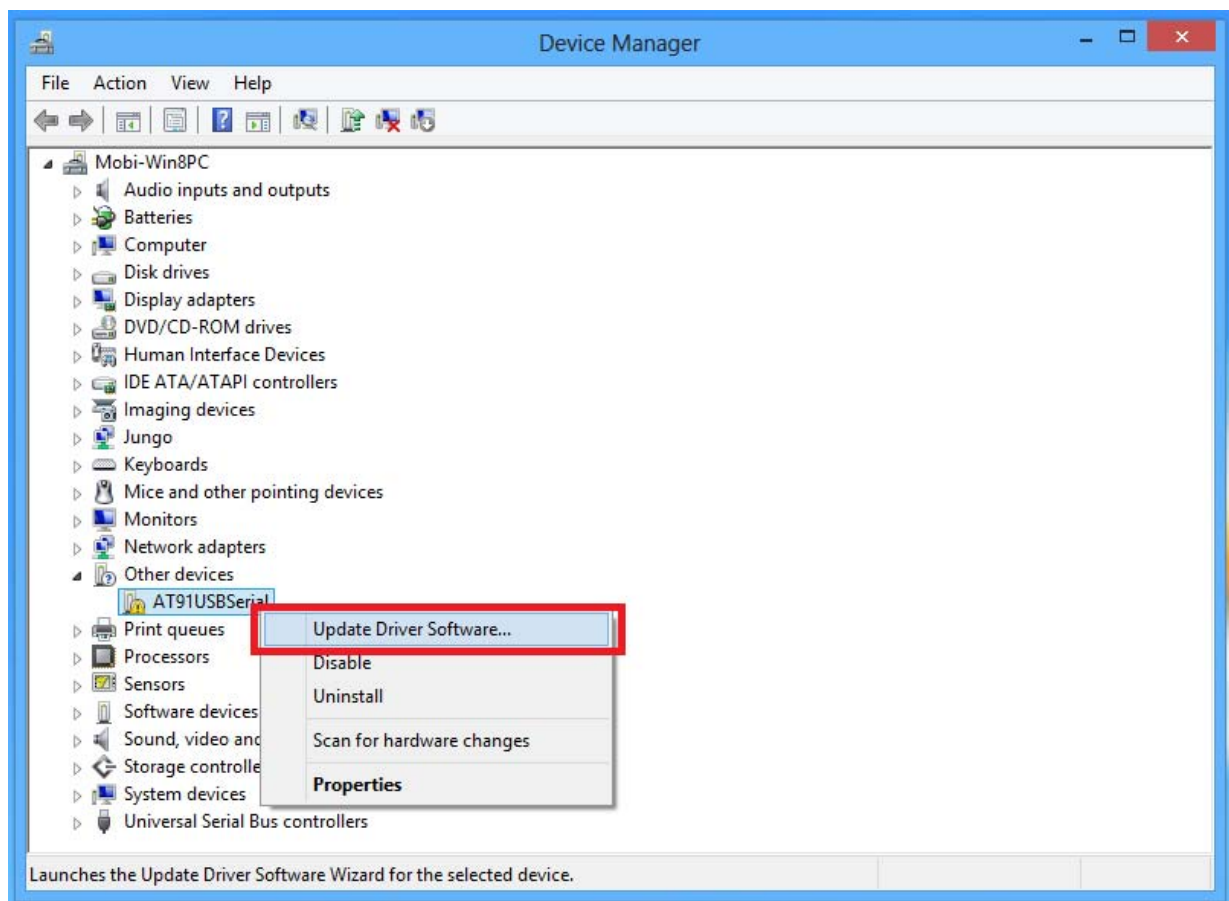



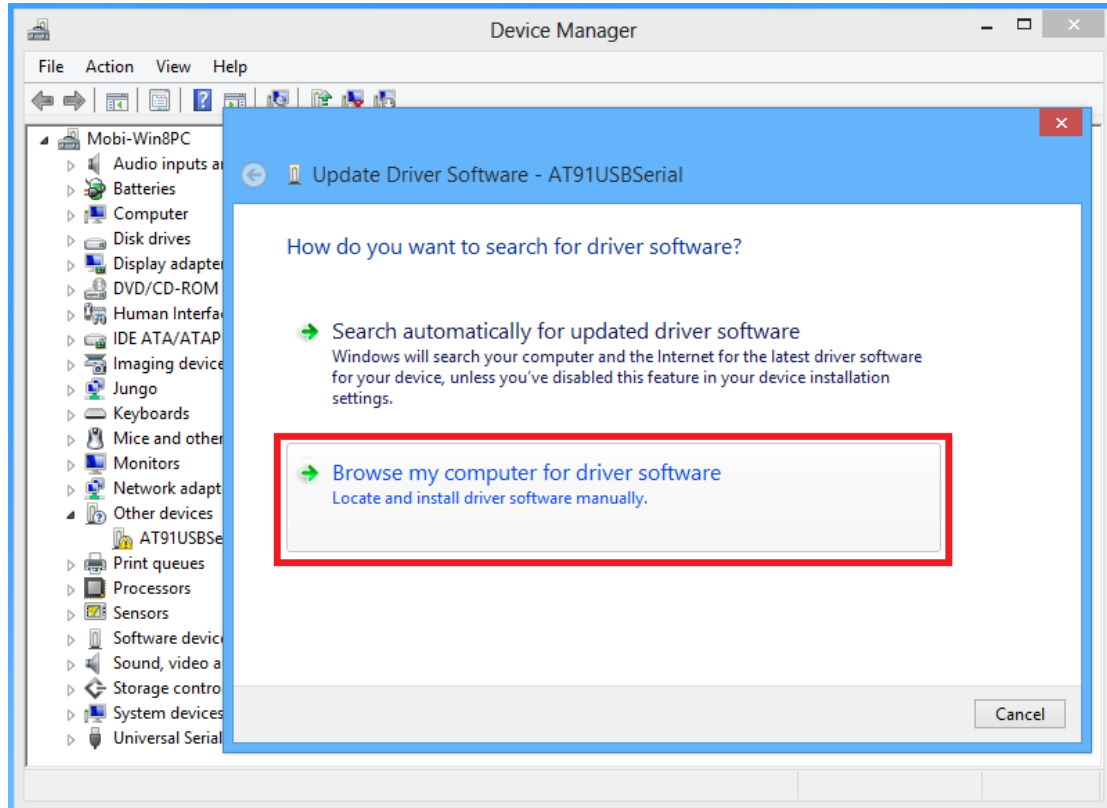



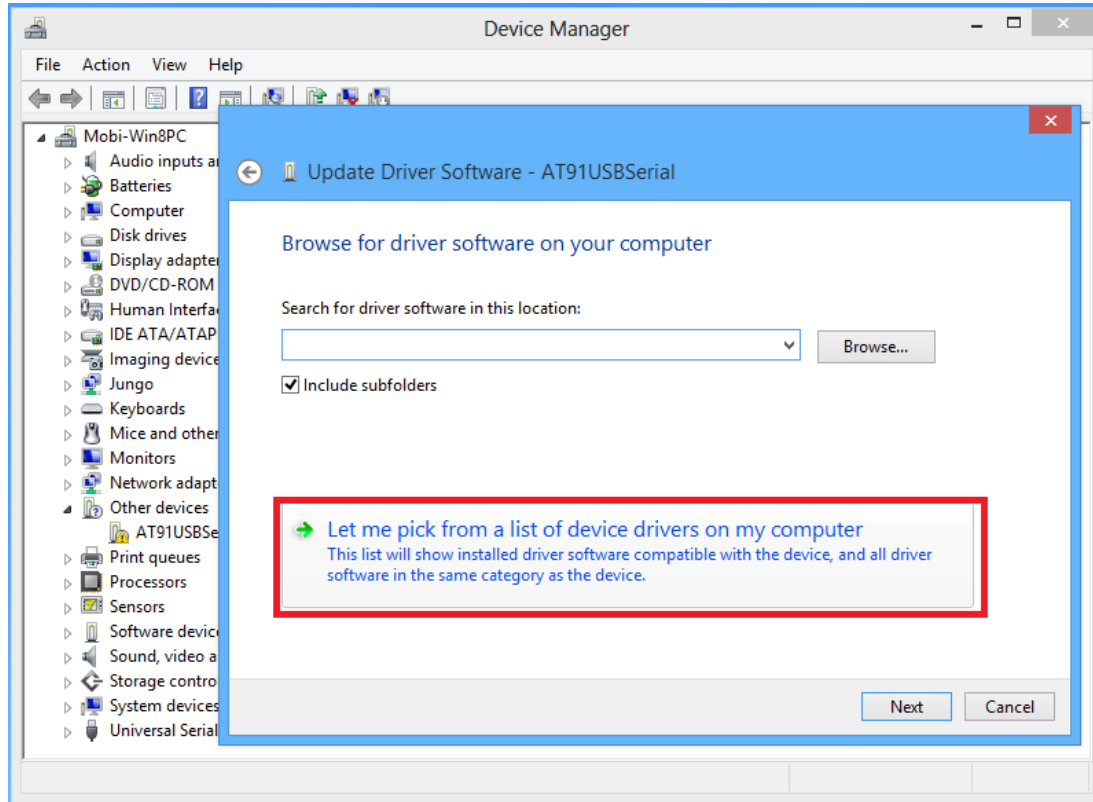


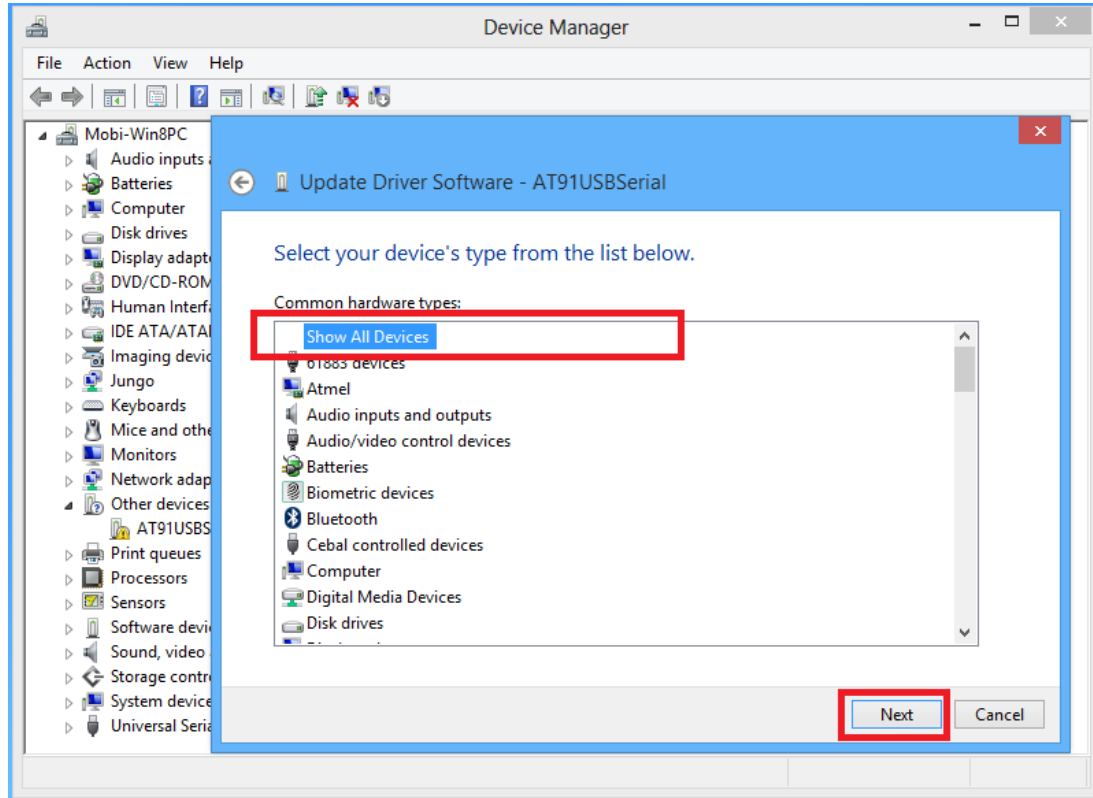

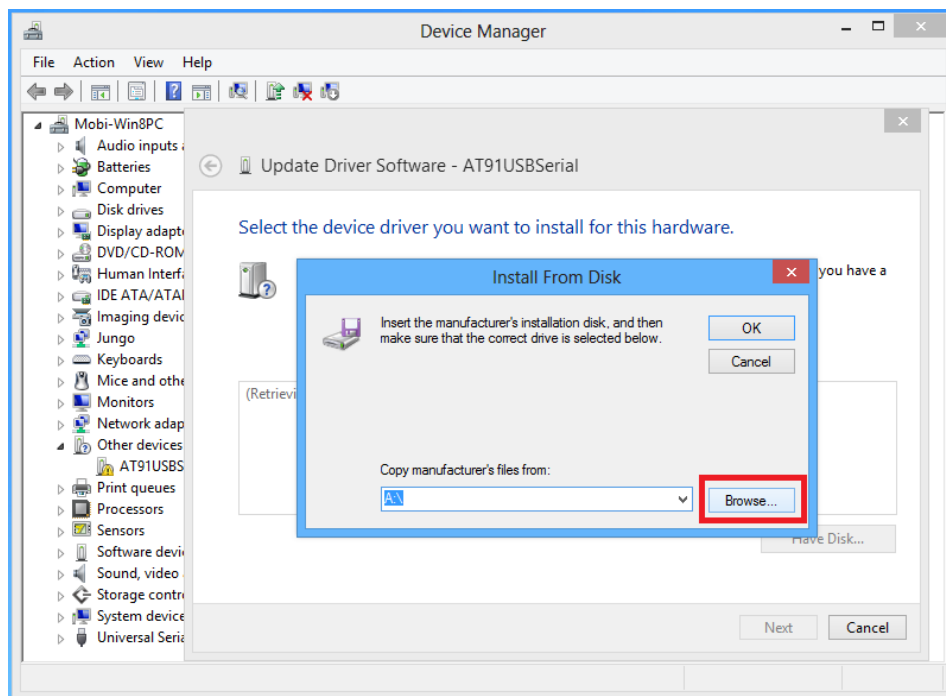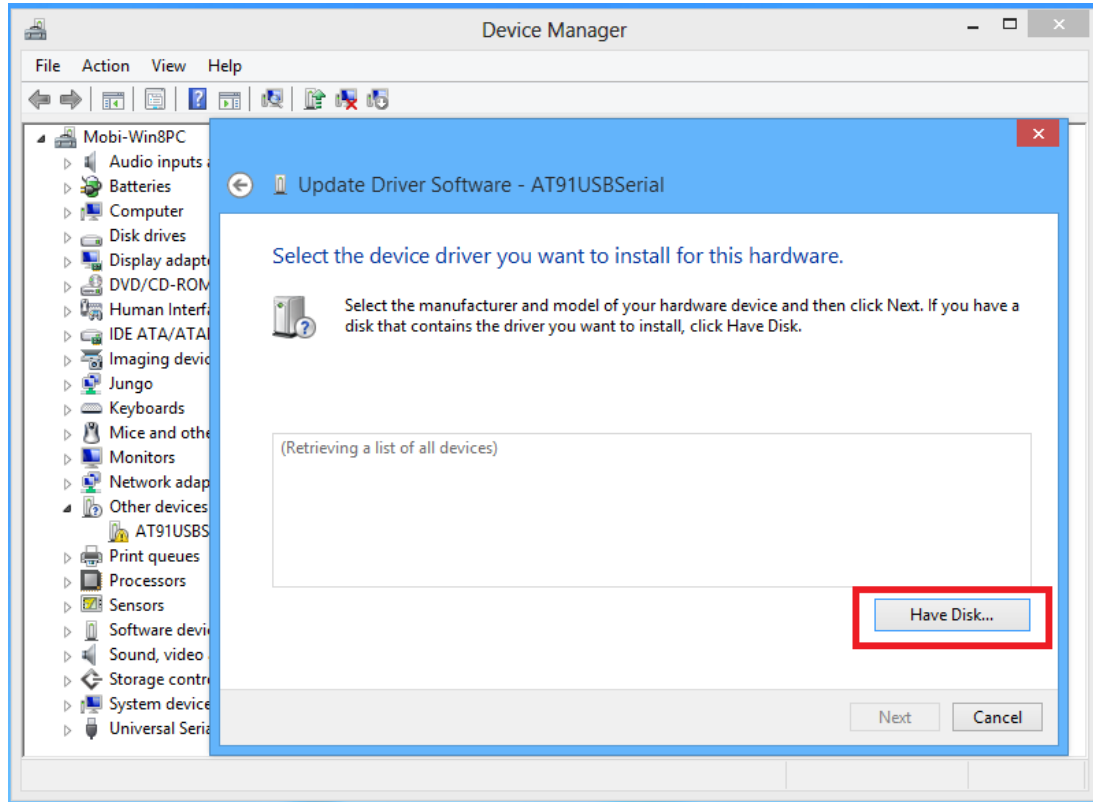

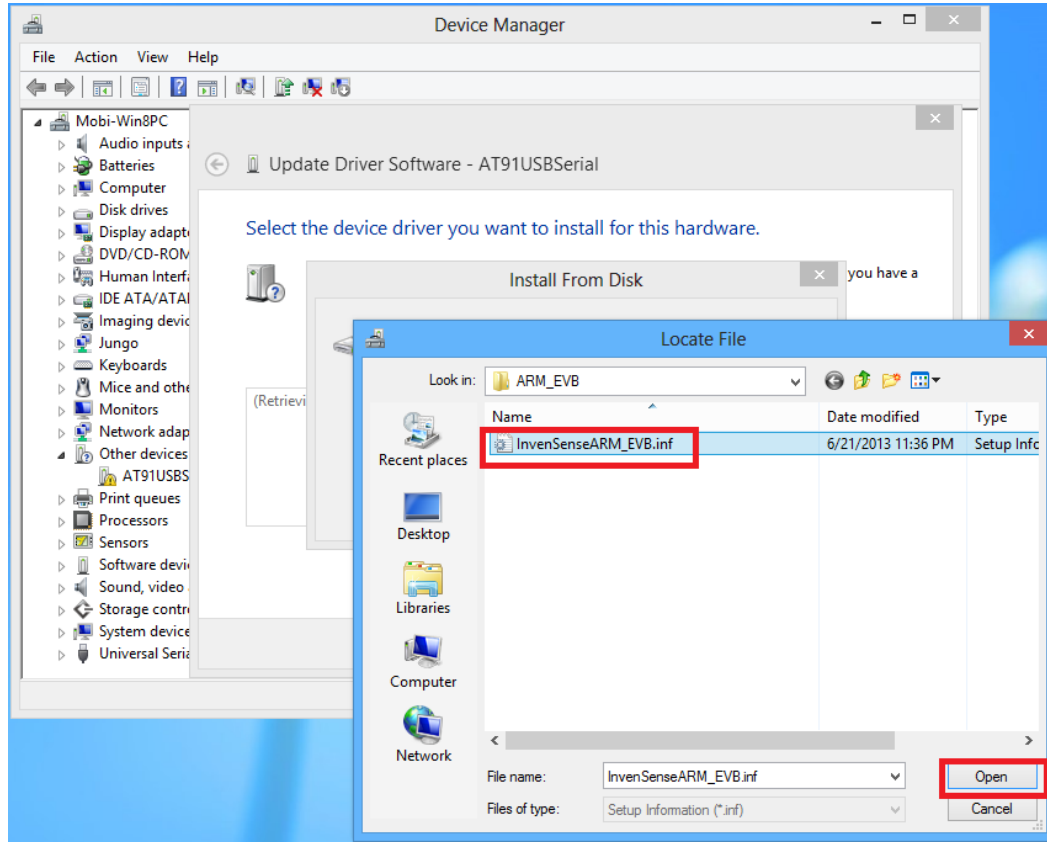

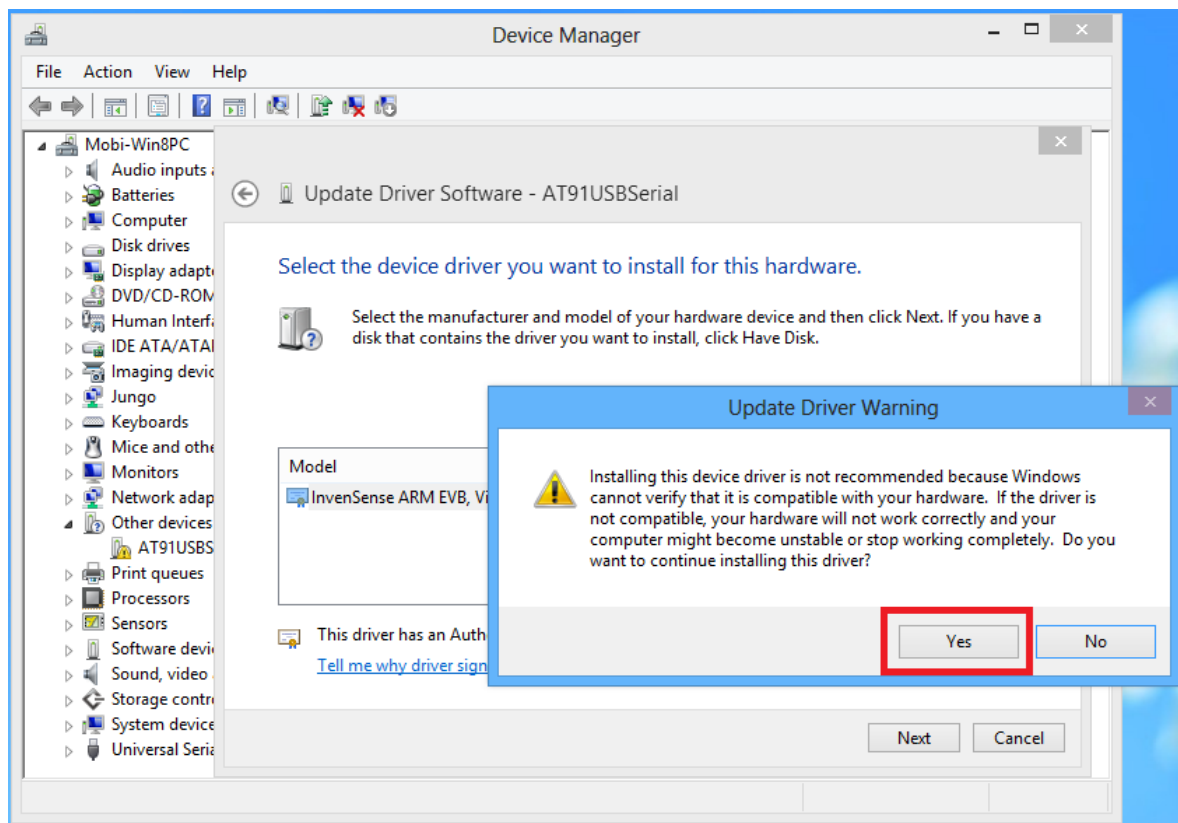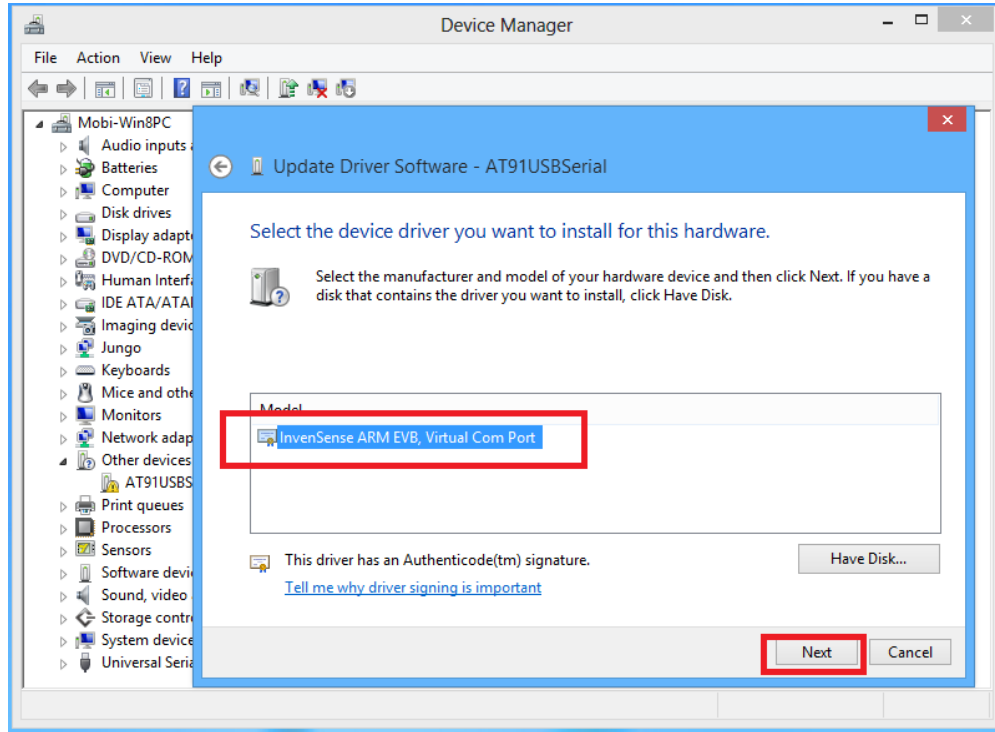

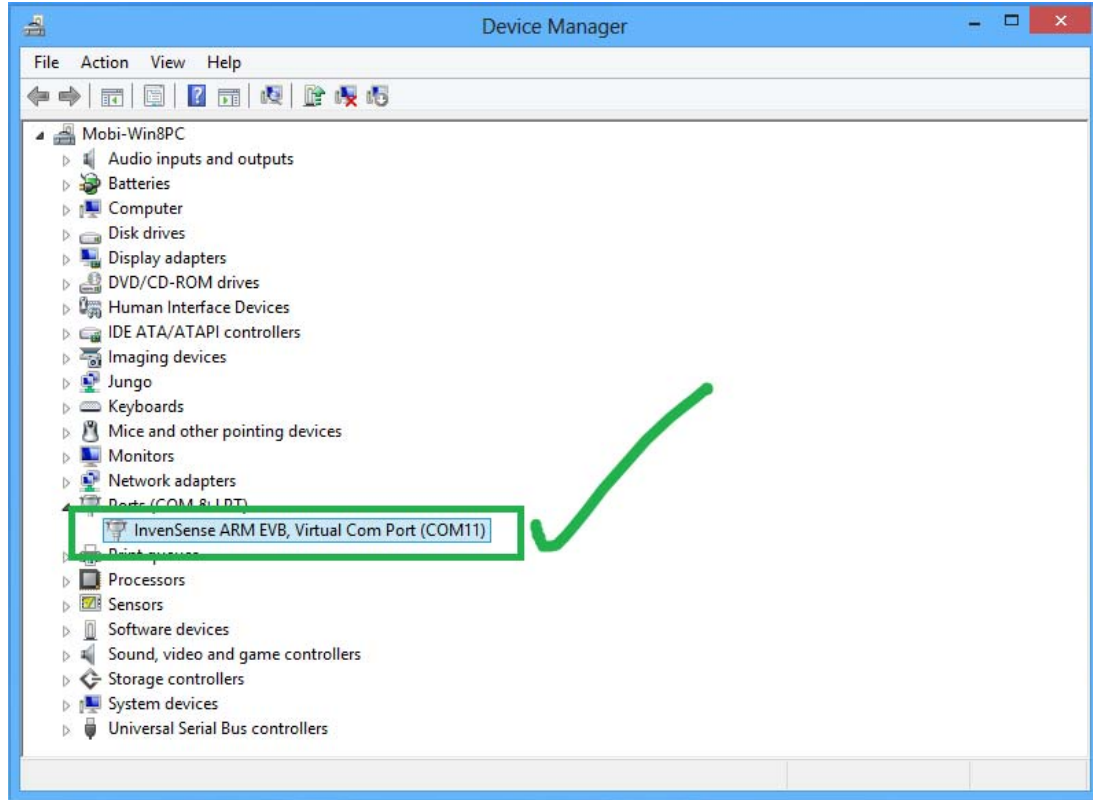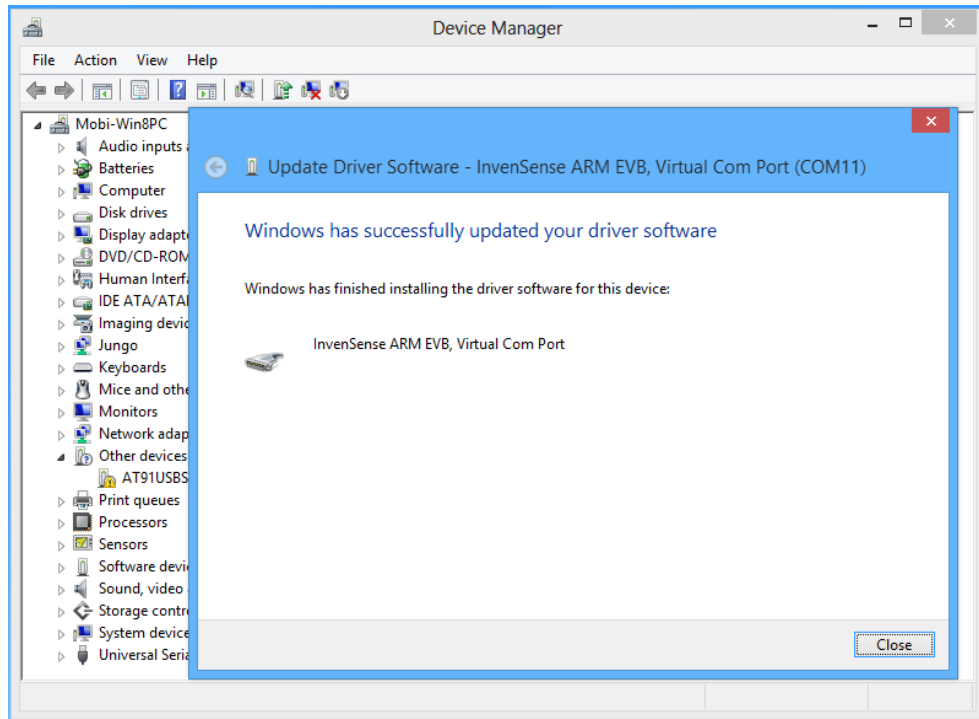

	Demo COM Setup v1.1	Version #: 1.0 Release Date: 08/31/2012
---	-----------------------------------	--

4. Unplug and device and plug in again, it should be recognized as “InvenSense ARM EVB”.