

AMPROBE®

A Fluke Company

2017-2018 Focus Products Catalog



Tested By The Best

Tested by Fluke Labs
Safety certified by  
More than 500 products worldwide
Ordered and supported through Fluke

Focus Products Catalog 2017-2018

Underground Cable Locators

AT-3500 Underground cable locator	3
SC-3500 Signal clamp accessory	3
MLS55-3 Signal probe accessory	3

Wire Tracers

AT-7030 Advanced wire tracer kit	4
AT-7020 Advanced wire tracer kit	4
AT-4005-A Advanced wire tracer	5
AT-4004-A Advanced wire tracer	5
AT-4003-A Advanced wire tracer	5
AT-4001-A Advanced wire tracer	5
AT-2005-A Advanced wire tracer	6
AT-2004-A Advanced wire tracer	6
CT-326-C Current tracer	6

Breaker Finder

BT-250 Circuit breaker tester	7
-------------------------------	---

Electrical Testers

INSP-3 Wiring inspector circuit tester	8
ST-101B and ST-102B Receptacle testers	8
TIC 300 PRO High voltage detector	9
TIC 410A Hot stick accessory	9
MO-100 Milliohm meter	9

Environmental Testers

GSD600 Gas leak detector	10
RLD-1 Refrigerant leak detector	10
TX900 Microwave leakage detector	11
TMULD-300 Ultrasonic leak detector	11
LM-100 Light meter	12
LM-120 Light meter	12
LM-200LED LED light meter	12
SM-10 Sound meter	12
SM-20-A Sound meter	12
SM-CAL1 Sound meter calibrator	13
MT-10 Moisture meter	13

External Probe Anemometers

TMA5 Mini vane anemometer	14
TMA-20HW Hotwire anemometer	14
TMA-2temperature	14
TMA40-A Datalogging anemometer	15
TMA10A Anemometer with flexible precision vane	15

Thermometers

TR200-A Temperature and relative humidity data logger	16
TR300 Temperature and relative humidity data logger	16

Solar

SOLAR-100 Solar power meter	17
SOLAR-600 Solar power analyzer	17

Relays

R-1155 Remcon relay switch	18
RC-120S Remcon relay switch	18

Accessories

ELS2A AC Current line splitter	18
--------------------------------	----

No Hassle Warranty

No waiting. No shipping charges.

Amprobe is committed to delivering the highest quality test and measurement products and provides a 1 year warranty with most products. The length of the product warranty is stated in the user manual that comes with each product, which can be downloaded from amprobe.com.

To better serve you, in the unlikely event that an Amprobe product requires warranty service, Amprobe authorizes over-the-counter

product exchange from the authorized Amprobe distributor for which the product was purchased, within 30 days from the date of purchase for products with a list price up to \$500. For products with a list price greater than \$500 or for issues encountered after the first 30 days but within the warranty period, please contact the Amprobe Service Department at 1-877-AMPROBE for warranty services.



AT-3500 Underground Cable/Pipe Locator System

Keep productivity high and operational costs low, with the AT-3500. This rugged, economical solution helps you locate underground energized and de-energized wires, cables and pipes. Great for parking lot and airport lighting applications, it precisely pinpoints buried services, with exceptionally fast sound and meter response.




- Precisely pinpoint buried cables and wires
- Three testing modes for best accuracy:
 - Passive power (50 Hz / 60 Hz)
 - Passive radio (RF)
 - Active T-3500 signal generator with induction mode directly connected to the cable with test leads or optional clamp
- Proven 33 kHz frequency for most locating applications
- Avoid lines at utility construction sites with highly sensitive power and radio modes
- Take depth measurements up to 16' (4.9m)
- Backlit multiple-segment digital display with audible alerts to show and tell location of buried cables
- Semi-automatic gain control for fast signal location and control



AT-3500

FEATURES	AT-3500
Depth Measurement	16 ft (4.9 m)
Passive Tracing Frequencies	50 Hz / 60 Hz
Transmitter Frequency	Single, non-adjustable
Receiver Active Frequencies (Hz)	32.768 kHz
Receiver Passive Frequencies (Hz)	Range 1: radio 15 kHz to 23 kHz Range 2: power network 50 Hz / 60 Hz; optionally 100 Hz (can be adjusted by Amprobe service personnel)
Receiver Depth Display Accuracy	Range 1: radio +/- 20% Range 2: power network +/- 20% Range 3: transmitter +/- 5% (>5 m (6 ft), +/- 20% (<5 m (15 ft))
Receiver Depth Range	Maximum 16 ft (4.9 m)

INCLUDED ACCESSORIES: Receiver, transmitter, connection cables, ground stake, carrying case, user manual, batteries (installed)



★★★★★
TOP RATED
"Great for finding depth and location"

"I've used one for years locating phone and gas lines and it works great. I can find and track wire or pipe and also know how deep within a few inches for digging and locating."

- AT-3500 customer reviews



Recommended Accessories

SC-3500 Signal Clamp
MLS55-3 Pipe Transmitter



AT-7000 Advanced Wire Tracer

Get accurate results in minutes with new features and technologies that simplify wire tracing and breaker identification. The Receiver's patented Smart Sensor™, with its innovative new antenna design and advanced signal processor, clearly displays the location and orientation of energized wires in walls, floors and ceilings on the large color TFT LCD screen. The powerful Transmitter utilizes two optimal frequencies for both energized and de-energized wire and breaker tracing, delivering consistently accurate results for novice users and experts alike. The new Scan and Locate feature clearly identifies the one correct breaker or fuse, eliminating the confusion from multiple false positive readings, common in older technology tracing tools.

- Traces wires in walls, ceilings, floors and corners
- Locates breakers and fuses
- Pinpoints shorts and opens
- High resolution 3.5" TFT LCD color display
- Three power modes
 - "High" power mode for normal circuits
 - "Low" power mode for precision tracing in difficult areas
 - "Clamp" power mode provides a boosted signal using signal clamp
- Two automatically selected frequency modes for optimal tracing on energized and de-energized circuits
- Signal booster rechargeable battery pack (BR-7000-T) increases transmitter signal strength
- Clamp-on attachment (SC-7000) for inducing signal into wires without access to bare conductors
- Embedded help screens make set-up easy and error free



AT-7000-R
Receiver



AT-7000-T
Transmitter

SC-7000
Signal Clamp

FEATURES		AT-7020	AT-7030
Standard Features	Traces energized and de-energized wires	•	•
	Locates energized and de-energized breakers and fuses	•	•
	Finds shorts and opens	•	•
	Non-contact voltage detection	•	•
Advanced Features	Smart Sensor™ - wire position and direction indicator	•	•
	"Scan and Locate" breaker finder	•	•
	Two frequency modes for optimal tracing in energized (6 kHz) and de-energized (33 kHz) circuits	•	•
	Three power modes (high, low and clamp) for peak performance	•	•
	High resolution 3.5" TFT LCD color display	•	•
	Hot Stick attachment adapter	•	•
	Signal Booster Li-Ion Rechargeable 7.2V Battery Pack		•
	Signal clamp attachment		•

KIT CONTAINS		AT-7020	AT-7030
AT-7000-R	Receiver unit with Smart Sensor, Tip Sensor and color TFT LCD display	•	•
AT-7000-T	Transmitter with two transmission frequencies (6 kHz and 33 kHz) and three power modes (high, low, clamp)	•	•
TL-7000	Test Lead Set with alligator clips (Black & Red), 30 ft. grounding lead, power cord, plug adaptors and light socket adapter	•	•
CC-7000	Custom Amprobe hard carrying case that securely holds transmitter, receiver, signal clamp, test leads and accessories	•	•
SC-7000	Signal Clamp accessory for inducing a signal into wires without access to bare conductors	(optional)	•
HS-1	Three-way magnetic hanger for AT-7000-T transmitter, allowing for convenient hanging of unit, placement on belt or as a stand	(optional)	•
BR-7000-T	Signal Booster Rechargeable Battery Pack (LI-ION, 7.2 V, 2.2 Ah), provides increased signal transmission power in High and Clamp modes	(optional)	•
BR-7000C	External battery charger for BR-7000-T	(optional)	(optional)

INCLUDED ACCESSORIES: Refer to the "Kit Contains" table above.



★★★★★ TOP RATED "Great Tracer"

"I still have a lot to learn about this kit but am very satisfied with my purchase and it will be a very useful tool for years to come."

"This circuit breaker tracer works perfectly but you MUST follow the instructions. The unique auto-calibration system ensures that the correct breaker is identified every time without any false indications."

- AT-7000 customer reviews



AT-7020



AT-7030

AT-4000-A Series Advanced Wire Tracer

Amprobe invented wire tracer technology decades ago and continues to set the standard today. The most advanced of all wire tracers, the AT-4000-A Series combines the technology, features and functions to make wire tracing fast and precise.

- One universal transmitter automatically switches to trace energized and non-energized (open, broken) wires
- Receiver is not position-sensitive - get accurate readings without rotating
- Locates breakers, neutrals, and ground lines
- Locates and traces wires in walls, floors, conduit, and computer cables
- Pinpoints shorts, ground faults and broken wires
- Performs tests without having to interrupt power
- Does not interfere with sensitive electronic equipment
- Precise sensitivity adjustment
- Battery booster strengthens signal for open tracing
- Clamp-on attachment injects signal for non-contact operation



AT-4005-A

FEATURES	RANGE			
Transmitter operating voltage	9 V - 300 V AC/DC			
Operating frequency	32.786 kHz			
Receiver short mode range and open mode range	20' (6 m) in air from the traced wire under test conditions			
	AT-4001-A	AT-4003-A	AT-4004-A	AT-4005-A
Traces energized and de-energized wires	•	•	•	•
Locates energized and de-energized breakers and fuses	•	•	•	•
Finds shorts and opens	•	•	•	•
Clamp-on attachment for inducing signal into wires without access to bare conductors	—	—	•	•
Signal Booster 24V NiCad Rechargeable Battery Pack	—	—	—	•
KIT CONTAINS	AT-4001-A	AT-4003-A	AT-4004-A	AT-4005-A
Carrying Case	Soft SV-1000	Hard CC-AT-4000	Hard CC-AT-4000	Hard CC-AT-4000
Receiver R-4000 CON	•	•	•	•
Transmitter T-4000	•	•	•	•
110V Pigtail - Banana Plug Cord Set C2901	•	•	•	•
Alligator Clip - Banana Plug Cord Set C2902	•	•	•	•
Grounding Test Lead 25' (7.6 m) MTL-G	•	•	•	•
Alligator Clip for Ground Lead VRC-320	•	•	•	•
Clamp-on Transmitter Accessory A2202	—	—	•	•
Rechargeable Battery Pack B2024	—	—	—	•
Battery Pack Recharger B2025	—	—	—	•
User manual	•	•	•	•

INCLUDED ACCESSORIES: Refer to the "Kit Contains" table above.

Recommended Accessories

A2202 Clamp-on Transmitter Accessory



B2024 Rechargeable battery Pack



B2025 Battery Pack Recharger



AT-2000-A Series Wire Tracers

Without interrupting power, you can trace live wires buried or hidden behind walls up to 13' (4 m) deep.

- Traces de-energized and open (broken) wires
- Locates breakers, neutral and ground lines
- Locates and traces wires in walls, floors, conduit, computer cables, etc.
- Pinpoints shorts, ground faults and broken wires
- Does not interfere with sensitive electronic equipment



AT-2005-A



AT-2004-A

FEATURES	AT-2004-A	AT-2005-A
Traces energized and de-energized wires	•	•
Locates energized and de-energized breakers and fuses	•	•
Finds shorts and opens	•	•
Clamp-on attachment for inducing signal into wires without access to bare conductors	•	•
Signal Booster 24V NiCad Rechargeable Battery Pack	–	•

KIT CONTAINS:	AT-2004-A	AT-2005-A
R-2000 Receiver	•	•
S2600-A Transmitter 9-300 V	•	•
T2200 Transmitter for open tracing	•	•
Clamp-on Transmitter Accessory A2201CE	•	•
B2024 Rechargeable Battery Pack	–	•
B2025 Battery Pack Recharger	–	•
C2901 Cordset 110 Volt Plug to Banana Plugs	•	•
C2902 Cordset Alligator Clips to Banana Plugs	•	•
User manual	•	•

INCLUDED ACCESSORIES: Refer to the "Kit Contains" table above.

CT-326-C Current Tracer

For tough industrial applications, we recommend these heavy-duty current instruments to trace live wires buried underground or hidden behind walls up to 4' (1.2 m) deep.

- Performs tests without having to interrupt power
- Locates breakers, neutral and ground lines
- Locates and traces wires in walls, floors, conduit, computer cables, etc.
- Pinpoints shorts and ground faults
- Does not interfere with sensitive electronic equipment



CT-326-C

FEATURES	CT-326-C
Traces energized wires and locates breakers without interrupting power	9 V → 300 V AC/DC
Traces non-energized wires (continuity and grounded wire) and pinpoints shorts & ground faults	Transmitter & 9 V batteries
Digital filter to assure accuracy in noisy industrial environments	•
Sensitivity settings	12

INCLUDED ACCESSORIES: User manual, transmitter, receiver, connection cables, carrying case

BT-250 Circuit Breaker Tester

Identify circuit breakers quickly and efficiently, count on this durable and dependable tracer. Designed for use in residential and light commercial environments.

- Works on all electrical systems from 90 to 250 V AC
- Meets the latest code requirement
- Automatic sensitivity adjustment
- Extremely accurate reading always finds the right breaker

FEATURES	BT-250
Voltage Range	90 V → 250 V
Frequency Range	40 Hz → 70 Hz

INCLUDED ACCESSORIES: User manual, transmitter, receiver, carrying case, connection cable, light fixture adapter, batteries (installed)



BT-250





INSP-3

INSP-3 Wiring Inspector

Verify in seconds whether a building's wiring complies with electrical code. Save time and money by testing more efficiently and identifying issues crucial to the safety and performance of an electrical system.

- Large display shows all relevant test data, no scrolling or switching screens needed
- Find faulty wiring that needs repair without removing outlet cover plates or panel covers, including:
 - Faulty splices and connections
 - Incorrect wiring
 - Undersized wiring
 - Faulty or incorrectly wired AFCIs/GFCIs
 - Incorrect line voltage
 - Poor ground quality
- Verify performance of electrical systems with user selectable 10, 15 and 20 amp loads
- Flashing screen clearly indicates incorrect wiring or voltage drop test failure
- Test without tripping circuit breakers or blowing fuses
- Check grounding for safety and ability to support sensitive electronic equipment

FEATURES	INSP-3	BEST ACCURACY
Load	Constant 10, 15 or 20 amp simulation regardless of line voltage	–
Operating Voltage	95 V AC → 140 V AC	+/- 2% + 2 LSD
GFI Trip	6.0 mA nominal to trip GFI, 30 mA to trip RCD	–
AFCI Trip	Up to 8, 120 AMP pulses within 1/2 second period	–

INCLUDED ACCESSORIES: Power cord, 9 V alkaline battery (installed), user manual, carrying case



ST-101B

ST-101B / ST-102B Socket Testers

Easily check and confirm proper wiring of electrical receptacles with the Amprobe ST-101B and ST-102B Receptacle Testers. Quickly test sockets and confirm wiring and operation of AC outlets with the ST-101B and confirm that GFCI breakers are properly wired for protection with the ST-102B.

- Confirm proper wiring and operation of AC socket
- Easy-to-read lights indicate common wiring problems
- The trip test to confirm that GFCI protection is working properly (ST-102B only)
- For use on 110-125 V AC

FEATURES	ST-101B	ST-102B
AC Voltage	110 V → 125 V	110 V → 125 V
GFCI	–	•



ST-102B



ST-101B



ST-102B

INCLUDED ACCESSORIES: Instruction sheet



TIC 300 PRO High Voltage Detector

Rugged and reliable for utility, industrial, heavy manufacturing and mine safety applications, the Amprobe TIC 300 PRO with VolTest™ detects voltages in low, medium and high voltage applications with bright visual and loud audible alerts.

- Utility tool for checking transmission lines, power distribution equipment, down power lines, fuses, and load break connectors
- Lower voltage setting for checking voltage presence in breaker panels, breakers, power outlets and wiring
- Verifies presence of voltage from 30 V AC to 122,000 V AC (122 kV)
- MSHA certified and intrinsically safe
- Push button functionality for ease of use with PPE gloves
- Visual and audible voltage indication
- Self-test verifies tester works properly
- Ergonomic design with a convenient handle
- Drop-proof to 6' (1.8 m)

FEATURES	TIC 300 PRO	TIC 410A
VolTest™ Non-Contact Voltage Detection	30 V AC → 1500 V AC 1500 V AC → 122,000 V AC (with Hot Stick TIC 410A)	—
48" length	—	•
Voltage		Up to 121 kV

INCLUDED ACCESSORIES: CC-300 PRO carrying case, user manual, batteries (installed)



Recommended Accessories

TIC 410A
Hot Stick for the TIC 300 PRO
Safely check voltages up to 122 kV with this 48" Hot Stick and the TIC 300 PRO.



CC-300 PRO Carrying Case
(Replacement part)



TIC 300 PRO

TIC 410A
Hot Stick
(Extends to 48")



MO-100 Milliohm Meter

Spot potential failures fast with the portable, battery powered MO-100. Check for opens or shorts in motor windings, generators and transformers. Test heating elements and wire-to-wire resistance in critical electrical connections.

- Accurate four terminal measurement down to 100 $\mu\Omega$ without test leads resistance compensation
- Three test currents with over-temperature protection for measurement precision
- Protection against inadvertent connection to overvoltage
- Potential lead resistance, current lead resistance checks
- Indicates measurement errors due to temperature or connection problems
- Auto-hold and auto-off features
- Lightweight, robust and compact
- "O-Ring" sealed enclosure

FEATURES	MO-100
Measuring Ranges	0 → 200.0 m Ω in steps of 100 $\mu\Omega$ 0 → 2000 m Ω in steps of 1 m Ω 0 → 20.00 Ω in steps of 10 m Ω 0 → 200.0 Ω in steps of 100 m Ω 0 → 2000 Ω in steps of 1 Ω
Test Current	1 mA (2000 Ω range) 10 mA (20 Ω / 200 Ω ranges) 100 mA (200 m Ω / 2000 m Ω ranges)

INCLUDED ACCESSORIES: User manual, test leads, batteries (installed)




MO-100

9.8" (L) x 7.5" (W) x 4.3" (D)
(250 mm x 190 mm x 110 mm)



Recommended Part

MO-100-LEADS
Replacement
Test Leads



For detailed specifications go to amprobe.com



GSD600

GSD600 Gas Leak Detector

Detect dangerous methane or propane leaks that can lead to explosions and gas poisoning. With its five-level LED and audible alarms, the GSD600 helps you assess whether the area is safe or needs to be vented. The frequency of the beeping increases with the concentration of the gas, allowing you to pinpoint the source of the leak in piping or appliances. The display provides an accurate measurement of the presence of gas in the area.

- Detects combustible gases
- Quickly identifies and pinpoints gas leaks for closed piping systems
- Automatic calibration feature level LED alarm: >40, >80, >160, >320, and >640 ppm
- Mute function and LED alerts for quiet areas
- Built-in earphone jack (earphones not included) for loud environments
- Flexible probe to access difficult measurement areas
- Auto power-off

FEATURES	RANGE
Methane	40 ppm → 640 ppm
Propane	35 ppm → 580 ppm
Sensitivity	35 ppm (propane)

INCLUDED ACCESSORIES: Battery (installed), carrying case, user manual



★★★★★
TOP RATED

"This thing really works."

"The Amprobe GSD600 found a leak at the furnace shut-off valve, I tightened nut and that was fixed."

- GSD600 customer reviews



RLD-1

RLD-1 Refrigerant Leak Detector

Troubleshoot air conditioning systems quickly and accurately with the RLD-1. State-of-the-art technology makes it easy to precisely pinpoint a wide variety of halogenated refrigerant leaks.

- Detects R-134a, R-404a, R-407c, R-410a, R-22, Freon and other refrigerants
- Sensitive gas sensor and advanced digital signal processing for high accuracy
- Built-in suction pump for precise sensor response
- Tri-color LED display and audio clearly indicate leaks
- High-Medium-Low (H/M/L) leak sensitivity selector
- Automatic zero and background compensation
- Low battery indication
- Ambient concentration reset

Recommended Accessories

RLD-1 SENSOR Replacement Sensor (Replacement part)



FEATURES	RLD-1
Detectable Gases	R-134a, R-404a, R-407c, R-410a, R-22, Freon
R-22, 134a Sensitivity	H - 3g/year, M - 15g/year, L - 30g/year
R-404a, 407c, 410a Sensitivity	H - 4g/year, M - 20g/year, L - 40g/year
Alarm Method	Buzzer, Tricolor LED bar Indicator
Power Usage	2 C size (3V DC) Alkaline Batteries
Snake Tube Length	15.5" (40 cm)

INCLUDED ACCESSORIES: Batteries (installed), user manual, carrying case, leak check bottle, AC adapter



★★★★★
TOP RATED

"Best tool for the job!"

In over 25 years of business, I've seen units with suspected refrigerant leaks but were too small to find. With the Amprobe RLD-1 refrigerant leak detector I can take the guess work out of finding and repairing a refrigerant leak. I recommend that if you are in the HVAC business this is a must have for every tool bag!"

- RLD-1 Customer reviews



TX900 Microwave Leak Detector

For domestic and commercial appliance engineers who service microwave ovens, the TX900 verifies if the oven operates in accordance with current standards and regulations.

- Measures for wave leakage and tests oven power
- 8 dipole sensors to detect plane wave signals of any polarization
- Temperature compensation for accurate readings regardless of ambient temperature changes
- Analog bar graph
- Compact, ergonomic design
- Low battery indicator
- Auto-zero

FEATURES	TX900
RF Power Sensing Range	0 mW/cm ² → 10 mW/cm ²
Nominal Detecting Frequency	2.45 GHz
Resolution	0.1 mW/cm ²
Step Input Response	< 1 sec

INCLUDED ACCESSORIES: 2 x 500 ml plastic beakers, spirit (alcohol) glass thermometer, battery, carrying case, user manual



TX900

TMULD-300 Ultrasonic Leak Detector with Ultrasonic Transmitter

When leaking gases are not sufficiently pressurized, use the TMULD-300. It includes an ultrasonic transmitter that creates sound waves so you can check door or trunk seals for air tightness, or windshields for water tightness.

- Detects the ultrasonic noise created by pressure or vacuum leaks of any gas, regardless of type: CFC's, HFC's, Nitrogen, CO₂, Steam, etc.
- Unaffected by contaminants, or windy conditions
- Identifies failing solenoids, valves and bearings
- Audible & Visual Leak Indicators

INCLUDED ACCESSORIES: Flexible tubing adapter, tubular extension, carrying case, power parabola, headphone, batteries (installed), UT-300 transmitter, user manual



TMULD-300



★★★★★
TOP RATED

"Great product."

"This tool paid for itself many times over. I have found leaks large and small inside walls, on evaporator coils, condensers and water lines. I've loaned it to colleagues who purchased your product immediately after using mine. These tools lead the industry in leak detection through its sensitivity and ability to detect negative or positive pressure."

- TMULD-300, customer reviews

Recommended Accessories

UT-300 Ultrasonic Transmitter (ULD-300)
(Replacement part)

ULD-300-KIT1
Adapter Kit For ULD-300:
TEA-1 Flexible tubing adapter
PB-1 power parabola
HP-1 headphone
TE-1 tubular extension
(Replacement part)

LM-100 and LM-120 Light Meters

These portable, easy-to-use digital light meters measure interior illumination levels from fluorescent, metal halide, high-pressure sodium or incandescent sources. Switch off, reduce or increase the output level of lighting fixtures. Reduce the energy burden of the building by significantly increasing the efficiency of its lighting system.

- Measure in lux or footcandles, front panel switchable
- Simple, one-handed operation
- Silicon photodiode sensor and filter for accuracy and high-resolution
- Analog DC voltage output to operate with chart recorder or data logger (LM-120 only)
- Zero adjustment (LM-120 only)
- Auto power-off to save battery life

FEATURES	LM-100	LM-120	BEST ACCURACY
Ranging	Manual	Automatic/Manual	
Illumination Sensor	Silicon photodiode and filter		
Range Lux	200, 2000, 20000, 200000	20, 200, 2000, 20000, 200000	+/-3% (Calibrated to standard incandescent lamp 2856° K)
Range Footcandles	20, 200, 2000, 20000		
Data	Data hold, max	Data hold, min/max	
Zero	—	Yes	

INCLUDED ACCESSORIES: Batteries (installed), carrying case, user manual



LM-100

LM-200LED Light Meter

This professional tester accurately measures light output of LED sources for all visible light ranges.

- Lux or footcandle measurement units, user selectable
- Data hold
- Max recording captures highest light measurement
- Measuring lights source include all visible ranges
- Accurate measurements with spectral response close to CIE luminous spectral efficiency
- Angled light cosine correction
- Extendable wire (approximately 5' (1.5 m))
- Measurements according to JISC1609:1993 and CNS 5119 general A class specifications

FEATURES	LM-200LED	BEST ACCURACY
LED Light Measurement	200, 2000, 20000, 200000 lux	+/- 3% (Calibrated to standard incandescent lamp 2856° K) and corrected LED day white-light spectrum.
	20, 200, 2000, 20000 footcandle	

INCLUDED ACCESSORIES: User manual, battery (installed), carrying case



SM-10 and SM-20-A Sound Meters

These sound meters meet the measurement needs of safety engineers, health, industrial and safety offices as well as quality control. Use them to check compliance with safety regulations and perform acoustic analysis. They use two different weighting filters required by the IEC 651 and ANSI S1.4 Type 2 for audio filtering.

- A-weighting for general noise sound level
- C-weighting for measuring sound level of acoustic material control in various environments
- Display with 0.1dB steps on a 4-digit LCD
- Slow (1 sec) and fast (125ms) response settings to check peak and average noise levels
- PC interfaces (SM-20-A only)

FEATURES	SM-10	SM-20-A
Microphone	1/2" Electret condenser microphone	
Standard Applied	IEC 651 Type 2, ANSI S1.4 Type 2	
Dynamic Range	50 dB	
Time Weighting	FAST (125 ms), SLOW (1 sec)	
Frequency Range	31.5 Hz → 8 kHz	
Measuring Level Range (Auto Range)	A-Weighting: 30 dB → 130 dB C-Weighting: 35 dB → 130 dB	
Data	Data hold	Min/max
Internal Memory	—	14000 records

INCLUDED ACCESSORIES: Carrying case, user manual, battery (installed), USB cable download and software CD (SM-20-A only)



SM-20-A

SM-CAL1 Sound Meter Calibrator

This instrument generates the fixed sound level signals needed to calibrate sound level meters.

- Two output levels: 94 dB and 114 dB
- Output frequency: 1000Hz
- Fits 0.5" microphones
- Easy one-handed operation
- Low battery indicator
- CE: conforms to ANSI S1.40 – 1984 and IEC942 – 1988 Class 2

INCLUDED ACCESSORIES: Battery (installed), user manual



SM-CAL1

MT-10 Moisture Meter

Measure the moisture content of wallboard, wood, mortar, plaster or other building materials to identify areas of water damage or harmful mold growth. Check wood or concrete flooring before installation, wood during drying or before woodworking.

- Three-color LED indicates moisture severity
- Backlight makes display visible in dim areas

INCLUDED ACCESSORIES: User manual, battery



MT-10

TMA5 Mini Vane Anemometer

This pocket-sized tool gives you an easy way to measure air flow, temperature and humidity in the HVAC systems of residential, commercial or industrial buildings.

- Measures air velocity, temperature and ambient temperature (in °F or °C), humidity, dew point, wet bulb, wind chill
- Simple, two-button operation
- Selectable wind units: mph, ft/m, Knt, m/s, km/h, BF
- Maximum wind speed display
- Data hold
- Auto power-off with disable feature
- Low battery indication
- Ergonomic design with wrist strap
- External temperature probe included

FEATURES	TMA5
Wind Speed Range	0.5 → 44.7 mph, 60 → 3937 ft/m, 0.4 → 38.8 knt, 1.1 → 20.0 m/s, 0.7 → 72.0 km/h, 1 → 8 BF
Air Temperature Range	32°F → 122°F (0°C → 50°C)
External Temperature Range	-4°F → 158°F (-20°C → 70°C)
Air RH% Range	5% → 95% RH
Wind Speed Response	averaging every 2 seconds
Temperature Response Time	60 seconds (typical)
Air RH% Response Time	60 seconds (typical)
Wind-Chill Display	•
Dew Point Temperature	•
Wet Bulb Temperature	•


INCLUDED ACCESSORIES: Battery (installed), user manual, external temperature probe, ergonomic wrist strap



TMA5

Recommended Accessories

TPK-60 K-type external temperature probe



TMA-21HW Hot Wire Anemometer

Hot wire anemometer technology eliminates bearings and rotating parts to make these meters durable and measurements stable and accurate. It's the simple, safe way to monitor indoor air quality and measure air flow and temperature in residential, commercial and industrial air conditioning systems.

- 4' (1.2m) telescopic wand - no ladder needed for most commercial applications
- Measures air flow volume in CFM, CMM
- Instant average, 2/3 Vmax flow measurements
- Velocity m/s, ft/min, knots, km/hr, mph
- Relative humidity and temperature measurement
- Data hold, min/max with time stamp
- Data memory and real-time function (99 sets)
- 512KB auto data-logging capacity
- USB interface
- Wet bulb and dew point
- Large backlight LCD display shows five parameters

FEATURES	TMA-20HW	TMA-21HW	BEST ACCURACY
Air Flow	0.10 m/s → 30.00 m/s 0.2 km/hr → 110.0 km/hr 10 ft/min → 6000 ft/min 0.10 knots → 59.0 knots 0.12 MPH → 68.00 MPH		+/- 3% of rdg +/-1% FS
Air Flow Volume	0.000 CFM → 999900 CFM 0.000 CMM → 999900 CMM		+/- 3%
Temperature	—	- 4°F → 140°F (-20°C → 60°C)	+/- 0.9°F (+/- 0.5°C)
Relative Humidity	—	0.0 → 100%	+/- 3%
Data-logging via USB	—	•	—
Wet Bulb / Dew Point	—	•	—

INCLUDED ACCESSORIES: Batteries (installed), hard carrying case, user manual, USB cable and PC software



TMA-21HW

TMA40-A Anemometer, Relative Humidity and Temperature

With one tool, you can measure air velocity (FPM) or air volume (CFM), relative humidity, and temperature. Large digital display with backlight and flexible measurement vane makes measuring easier in difficult areas. Measures up to 99 points and logs up to 2400 measurements.

- Flexible measurement vane for accessing difficult areas
- Measures air velocity (fpm), air volume (cfm), relative humidity, and temperature
- Measure up to 99 points
- Data logging up to 2400 data points
- Optional PC interface for charting or analysis
- Large digital display with backlight

FEATURES	RANGE	RESOLUTION	ACCURACY
Air Velocity	0.4 to 32 m/s (1.3 to 105 ft/s)	0.1 m/s (0.1 ft/s)	+/- 3%
Air Volume	0 → 99999 (cfm/cmm)	0.1 CMM - 1 CFM	+/- 3%
Temperature	-4°F → 158°F (-20°C → 70°C)	0.1°F (0.1°C)	± 0.6°C (± 1°F)
Relative Humidity	0 → 100%	0.1%	+/- 3% @ 77°F (25°C)

INCLUDED ACCESSORIES: Carrying case, battery (installed), user manual, optional PC interface for charting or analysis



TMA40-A



★★★★★ TOP RATED "Great tool."

"The Amprobe TMA40-A is a great tool for air flow measurement. It does dew point, wet bulb, dry bulb, air speed, and air velocity. Great tool for troubleshooting duct problems."

- TMA40-A customer reviews

Recommended Accessories

TM-SWA USB Download Cable and Software CD



TMA10A Anemometer with Flexible Precision Vane

The essential tool for HVAC technicians, the TMA10A measures air velocity or volume (CFM), plus temperature. Just enter surface area type for accurate airflow measurements.

- Large dual display for viewing airflow or velocity measurement including temperature
- Long flexible cord to access remote vanes
- Continuous moving average for up to 2 hours
- Air velocity average for up to 8 points
- Multi-point air flow (cfm) average
- PC interface for charting or analysis
- Min/max/average reading on a single point
- Data hold
- Auto power-off function

FEATURES	RANGE	BEST ACCURACY
Air Velocity	0.40 → 25.00 m/s	+/- 2% of full scale
	125 → 4900 ft/min	+/- 2% of full scale
Air Flow	0.01 → 99.99 m³/sec	0 → 9.999 m
	1 ft → 9999 cfm	0 → 9.999 ft
Air Temperature °F (°C)	32°F → 122°F (0°C to 50°C)	+/- 1.5°F (0.8°C)

INCLUDED ACCESSORIES: Carrying case, battery (installed), user manual, optional PC interface for charting or analysis



TMA10A



★★★★★ TOP RATED

"Does all that is asked of it! It is highly accurate and results are repeatable."

- TMA10A customer review

Recommended Accessories

TMA10A USB Download Cable and Software CD





TR200-A

TR200-A Temperature and Relative Humidity Data Logger

One compact unit monitors both temperature and humidity and records it on your PC using the USB interface. Amprobe software included.

- Record sample interval timing, start/stop, date, time, Hi/Lo alarm threshold, and units
- Visible LED warnings alert you to air quality problems
- IP-65 rating for dust and moisture
- Wall mountable

INCLUDED ACCESSORIES: Batteries (installed), user manual, PC software CD and USB cable



TR300

TR300 Temperature and Relative Humidity Data Logger

Wall-mountable, self-standing, or tripod mountable, this data logger configures to your application.

- Temperature, relative humidity, dew point or web bulb measurements with real-time date/hour stamp
- Audible and visual alerts help you monitor IAQ conditions
- Stores up to 16,000 readings
- Records data to a PC with USB cable and Amprobe software included
- Programming on-screen or from the PC

FEATURES	TR200-A	TR300
Dual Display LCD	—	•
Air Temperature Reading	14°F → 140°F (-10°C → 60°C)	-4°F → 158°F (-20°C → 70°C)
Temperature Accuracy	+/- 1°F (+/- 0.6°C)	+/- 1°F (+/- 0.6°C)
RH Reading	0.0 to 99.9%	0 to 100%
RH Accuracy	+/- 3% at 77°F (25°C)	+/- 3% from 10 - 90%
Recording	16000	16000
Dew Point Reading	—	•
On Screen Programmable	—	•
Software Programmable	•	•

INCLUDED ACCESSORIES: Batteries (installed), user manual, PC software CD and USB cable



SOLAR-100 Power Meter

Optimize the placement of solar systems and analyze window efficiency with the SOLAR-100. Measure solar output and calculate overall energy and efficiency.

- Windows performance testing: calculate and verify heating or heat reduction caused by direct sunlight
- Research the location of solar panels or solar water heaters
- Measures solar power and transmission
- Power mode measures incident solar radiation
- Transmission mode calculates the percentage of solar power transmission through materials such as windows
- Convenient display with remote sensor technology
- Selectable measurement units (W/m² or BTU/(ft²·h))
- Min/max function identifies locations with maximum or minimum power
- Also useful for physics and optical laboratories, meteorology, agriculture



Solar-100

★★★★★

TOP RATED

"A great instrument."

"This is an excellent device for quick measurements of irradiance out in the field. I was surprised that it can measure BTUs as well as headlight brightness and window tint."

It can also demonstrate the advantages of tracking and the effects of cloud cover. Great value for the money."

- SOLAR-100
customer reviews

FEATURES	SOLAR-100
Solar Power	Up to 2000 W/m ² , 634 BTU/(ft ² ·h)
Max/Min	•
Data Hold	•

INCLUDED ACCESSORIES: Battery (installed), carrying case, user manual



SOLAR-600 Solar Analyzer

Install, maintain, troubleshoot and evaluate the efficiency of solar panels with this these professional analyzers. The SOLAR-600 also offers real-time data logging and PC downloads for further analysis.

- Determine the proper inverter size and optimum power output position of panels
- Identify broken or worn-out cells
- I-V curve test with cursor for solar cells
- Maximum solar power (Pmax) search by auto-scan
- Maximum voltage (Vmaxp) at Pmax
- Maximum current (Imaxp) at Pmax
- Voltage at open circuit (Vopen)
- Current at short circuit (Ishort)
- I-V curve with cursor
- Calculation of panel efficiency (%)
- Manual single point test
- Real time datalogging and PC download

FEATURES	SOLAR-600
DC Voltage:	0.000 V → 9.999 V, 10.00 V → 60.00 V
DC Current:	0.01A → 9.99 A, 10.0 A → 12.0 A
DC Current Simulation	0.01 A → 9.99 A, 10 A → 12 A
Power	0 W → 720 W
Efficiency	•
Scan delay	0 mS → 3000 mS
Alarm	•
Solar Panel Area	0.001 m ² → 9999 m ²
Standard Light Source	10 W/m ² → 1000 W/m ²
Data Storage Memory	99 records
Data Logging	•

INCLUDED ACCESSORIES: User manual, rechargeable battery pack (installed), AC adapter, USB cable and software CD, test leads, carrying case



SOLAR-600

Recommended Accessories

SOLAR-BAT1 Rechargeable Lithium Battery
SOLAR-600
(Replacement accessory)



R-115S Remcon Momentary Switch Relay (3-wire) RC-120S Remcon Closet Light Relay (2-wire)

When you need low-voltage control circuits for safe operation in industrial and process control environments, choose these low-voltage relays with built-in transformers. Each unit operates independently, so you can install one relay and operate it with as many switches as needed or control multiple relays with a single switch.

- Uses light 22 gauge wire, saving the time and expense of pulling Romex or armored cable
- Operates silently so you can install relays at the fixture instead of at a remote location
- Simplifies wiring – no need to wire back to separate low voltage transformers



R-115S



RC-120S

FEATURES	R-115S	RC-120S
AC Voltage	105 V → 125 V	
AC Current	Up to 6.5 A (1/4 HP max motor load at 120 V)	
Frequency	60 Hz	
Safe Control Switching, Maximum	10 V DC 10 milliamps	



ELS2A

ELS2A AC Line Splitter

Measure the current on a 2-wire or 3-wire power cord up to 15 A without having to cut off the plug and separate the conductors, or open electrical boxes on 120 V lines. Use with any Amprobe clamp meter.

- Two measurement loops, 1X and 10X for increased sensitivity
- Built-in voltage measurement jacks to check for voltage sags and surges
- Rated for 120 V, 15 Amps




Safety Reference Guide

International safety standards

Test equipment must be designed to protect people who work in the high-voltage, high-current environments. In order to prevent injury, the International Electrotechnical Commission (IEC) develops international general standards for safety of electrical equipment for measurement, control and laboratory use. The most current standard 61010 specifies overvoltage categories for electrical distribution systems. The category rating increases based on the closeness to the power source and a higher level of user protection that is required from test equipment.

Proposed Energy Regions*

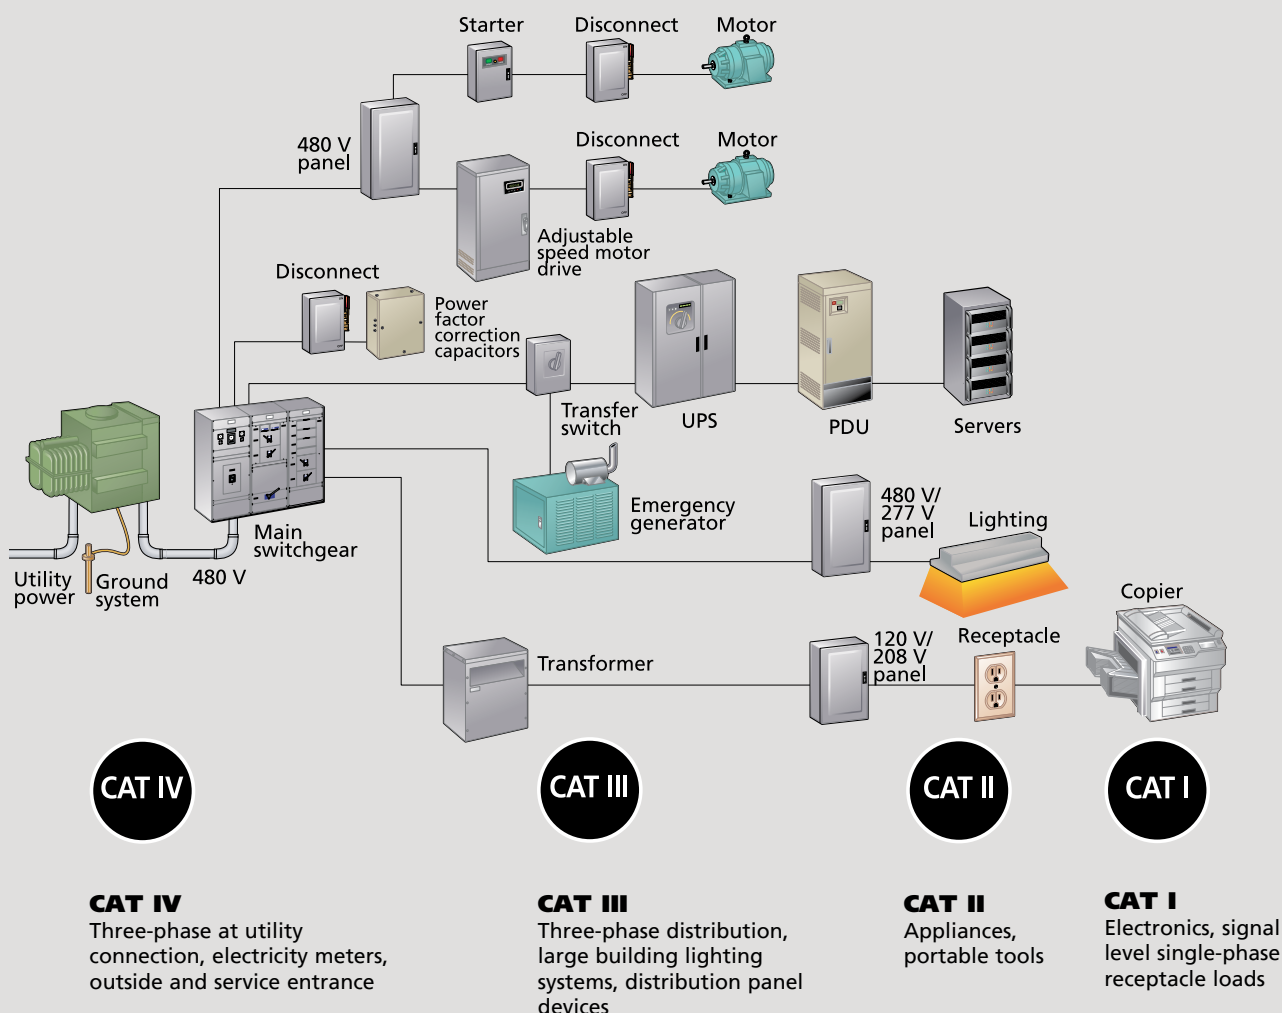

* Category ratings per IEC 61010-1
Category boundaries may not be exact

AMPROBE®

A Fluke Company

2017-2018 Focus Products Catalog



Tested By The Best

Amprobe®
Division of Fluke Corp.
6920 Seaway Blvd.
M/S 143F
Everett, WA 98203 USA
amprobe.com
P 877-AMPROBE (267-7623)

© 2017 Fluke Corporation.
All rights reserved.
Printed in the U.S.A.
6009156A

Specifications subject to change
without notice.